


## DTRO FRP Housing

- ☆ Designed for RO Technology.
- ☆ Produced by Winding Techniques.
- ☆ Special for High Concentration of Sewage Treatment.
- ☆ Excellent Property of Pressure and Corrosion Resistance.
- ☆ Smooth Inner Wall Surface.
- ☆ Certified by ISO9001, ISO14001.

### FRP DTRO Housing



Material	Fiberglass and epoxy
Process	Fiberglass Winding
Pressure Rate (Bar)	75 Bar, 150 Bar, 200 Bar optional
Available Height	745mm,1000mm,1150mm, 1200mm,1250mm, or customized
Operating Temperature	-7 °C-49 °C
Color	Original or customized
Certificate	ASME, ISO9001, ISO14001

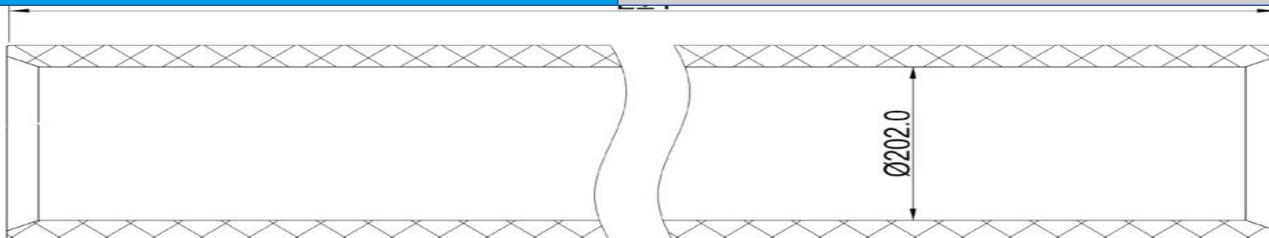

### Projects

