
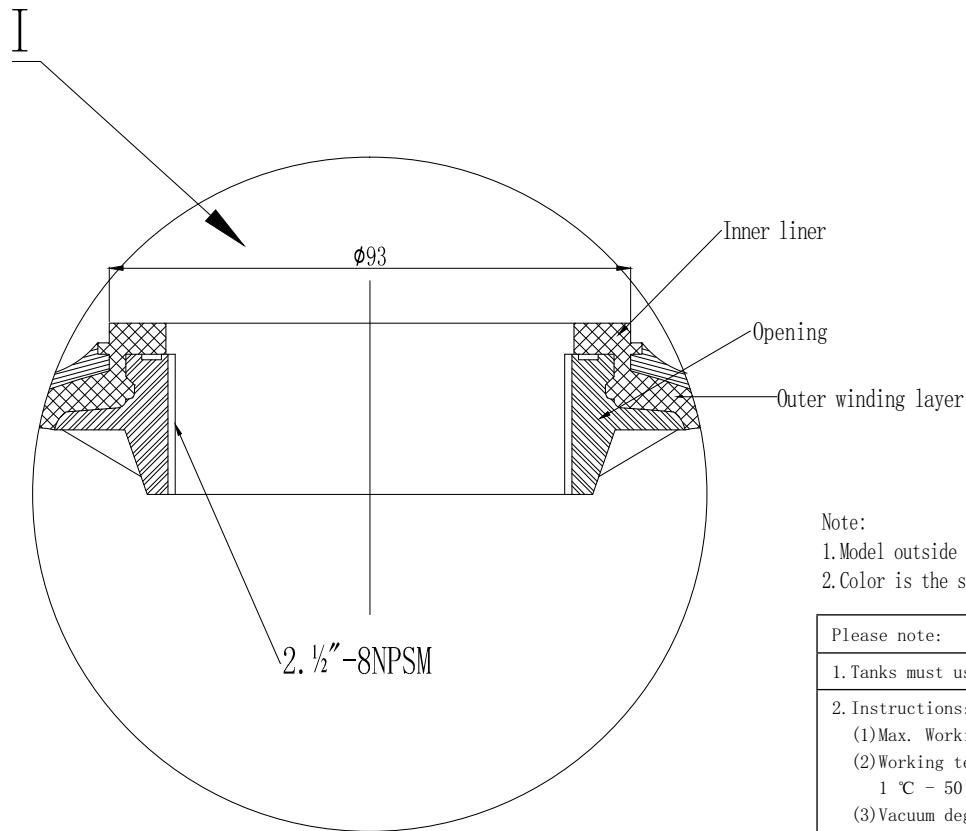


Technical Parameters															
Model	Opening	Volume	Dimension (mm)											Base	Weight
		(Ltrs.)	D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
9×17	-2.5"	13.8	231	240	455	433	275	140	50	4.8	1.8	5	1	Standard Base	2.2
9×35	-2.5"	31.1	231	240	900	878	720	140	100	4.8	1.8	5	1	Standard Base	3.6
9×42	-2.5"	37.8	231	240	1073	1051	893	140	100	4.8	1.8	5	1	Standard Base	4.3
9×48	-2.5"	43.7	231	240	1225	1203	1045	140	100	4.8	1.8	5	1	Standard Base	4.8

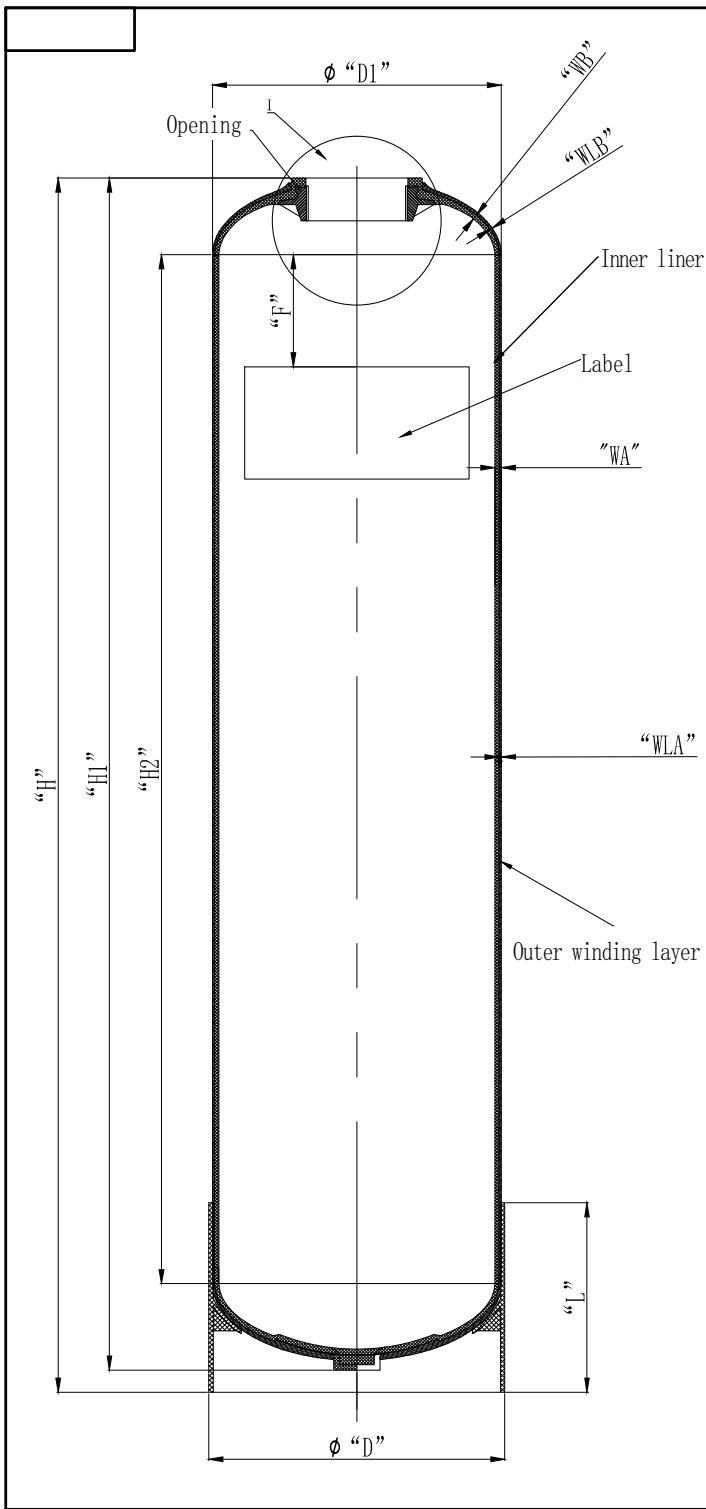

2 1/2"-8NPSM Internal thread	
Medium Dia.	2.762-2.768"
Small Dia.	2.705-2.715"
Large Dia.	2.843-2.849"

- Note:
- Model outside carton
 - Color is the same as package tape color

Please note:
1. Tanks must use with anti-vacuum valve.
2. Instructions:
(1) Max. Working pressure: 6 Bar (86 Psi)
(2) Working temperature:
1 °C - 50 °C (34 °F - 127 °F).
(3) Vacuum degree: 17 KPa (5"Hg)

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019.12.25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co. , Ltd.	
Material: FRP	Projection:
Model: 9-2.5"	Name: FRP softener tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/02
1/1 page	Unit: mm
	Do not measure drawing size