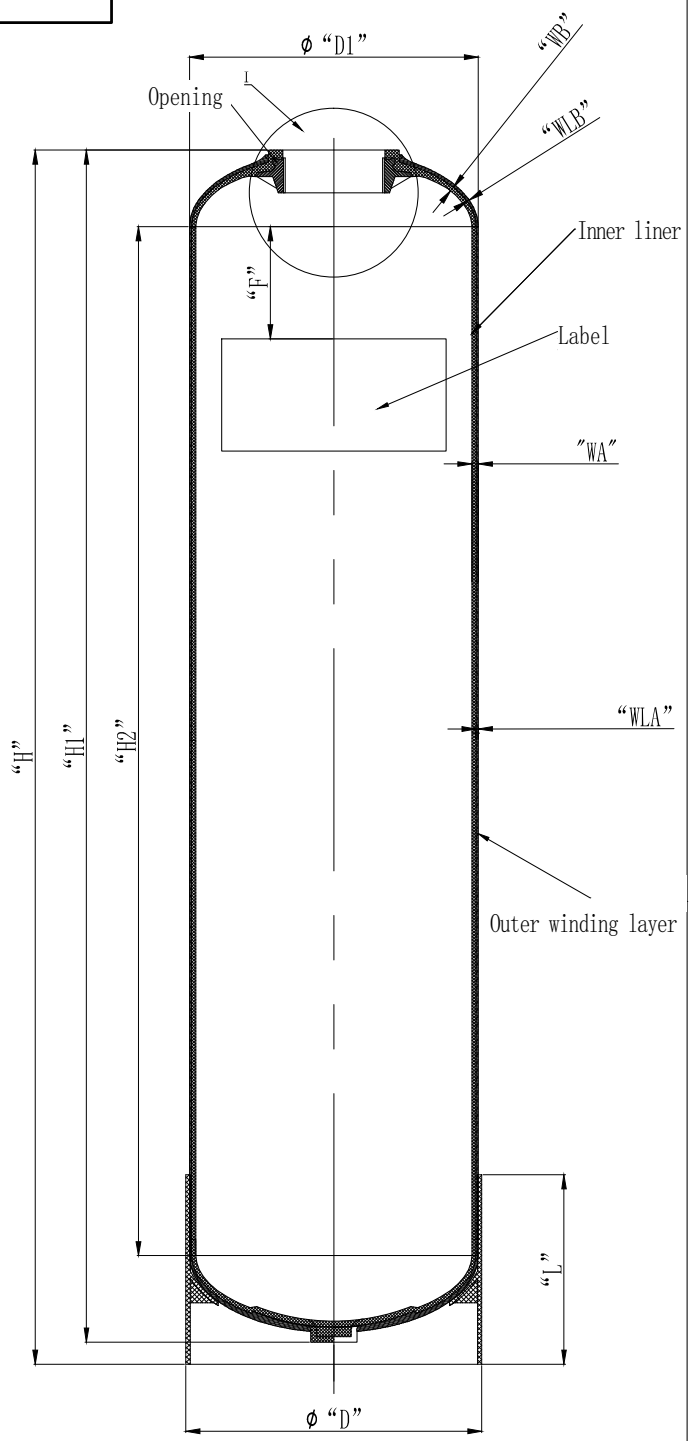

Technical Parameters

Model	Opening	Volume	Dimension (mm)											Base	Weight
		(Ltrs.)	D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
10×13	-2.5"	13.0	258	266	338	333	178	146.5	10	5	2	5	1	Standard Base	1.8
10×17	-2.5"	16.4	258	266	429	425	245	146.5	50	5	2	5	1	Standard Base	3.0
10×19	-2.5"	18.8	258	266	494	489	297	146.5	100	5	2	5	1	Standard Base	3.1
10×24	-2.5"	25.0	258	266	622	617	425	146.5	100	5	2	5	1	Standard Base	3.6
10×35	-2.5"	38.8	258	266	886	882	705	146.5	100	5	2	5	1	Standard Base	4.7
10×44	-2.5"	50.0	258	266	1135	1130	935	146.5	100	5	2	5	1	Standard Base	5.2
10×54	-2.5"	62.5	258	266	1380	1375	1195	146.5	100	5	2	5	1	Standard Base	6.5

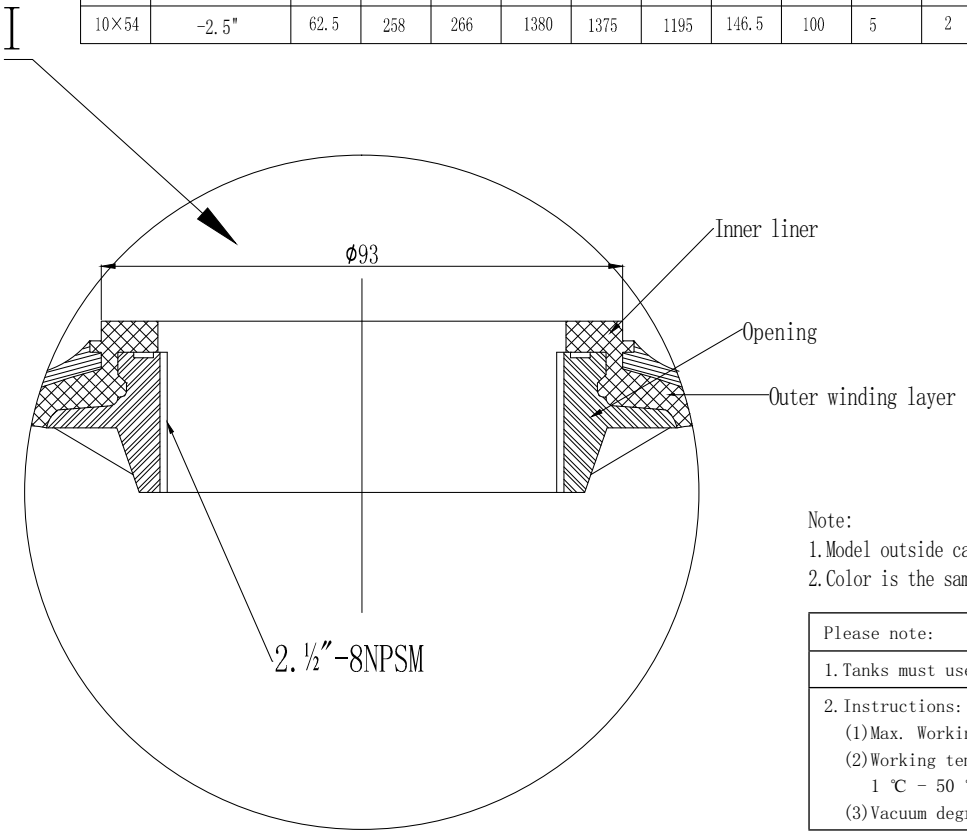

Note:
1. Model outside carton
2. Color is the same as package tape color

Please note:
1. Tanks must use with anti-vacuum valve.
2. Instructions: (1) Max. Working pressure: 10.5 Bar (150 Psi) (2) Working temperature: 1 ℃ - 50 ℃ (34 ℉ - 127 ℉). (3) Vacuum degree: 17 KPa (5"Hg)

2 1/2"--8NPSM Internal thread	
Medium Dia	2.762-2.768"
Small Dia.	2.705-2.715"
Large Dia	2.843-2.849"

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019.12.25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co., Ltd.	
Material: FRP	Projection:
Model: 10-2.5"	Name: FRP softener tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/03
1/1 page	Unit: mm Do not measure drawing size