
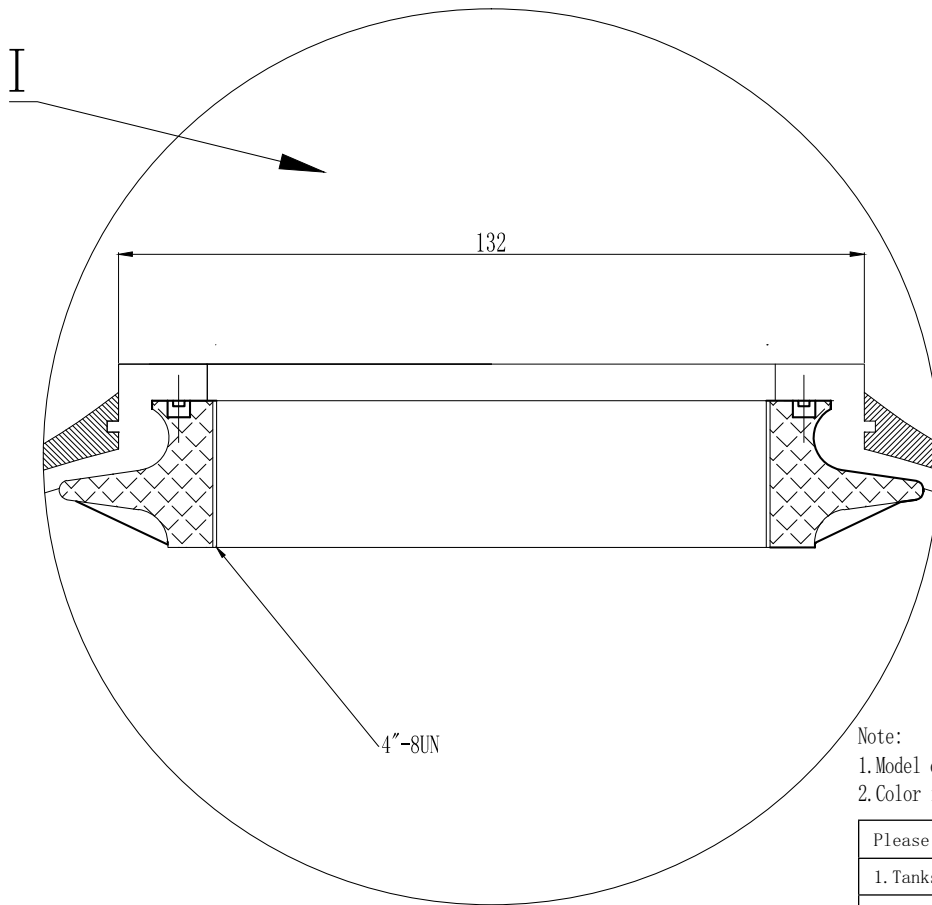


Technical Parameters															
Model	Opening	Volume	Dimension (mm)											Base	Weight
		(Ltrs.)	D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
14×52	-4"	115.3	359	369	1336	1331	1060	190	100	8	4	6	2	Standard Base	11.5
14×65	-4"	146.8	359	369	1661	1656	1390	190	100	8	4	6	2	Standard Base	14.0

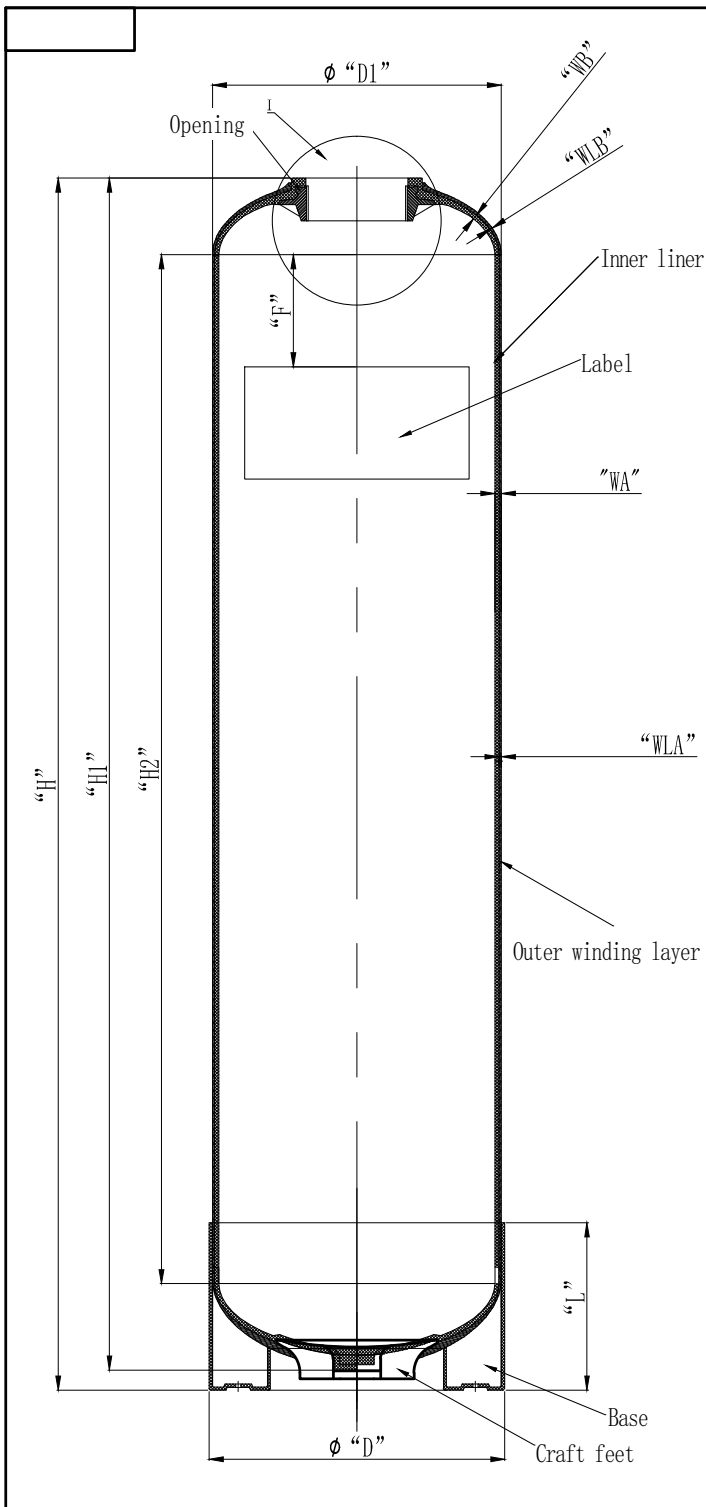

4"--8UN Internal thread	
Medium Dia.	3.918-3.930"
Small Dia.	3.865-3.875"
Large Dia	4.000-4.010"

- Note:
1. Model outside carton
 2. Color is the same as package tape color

Please note:
1. Tanks must use with anti-vacuum valve.
2. Instructions:
(1)Max. Working pressure: 10.5 Bar (150 Psi)
(2)Working temperature:
1 °C - 50 °C (34 °F - 127 °F).
(3)Vacuum degree: 17 KPa (5"Hg)

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019.12.25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co. , Ltd.	
Material: FRP	Projection:
Model: 14"-4"	Name: FRP softener tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/07
1/1 page	Unit: mm
	Do not measure drawing size