



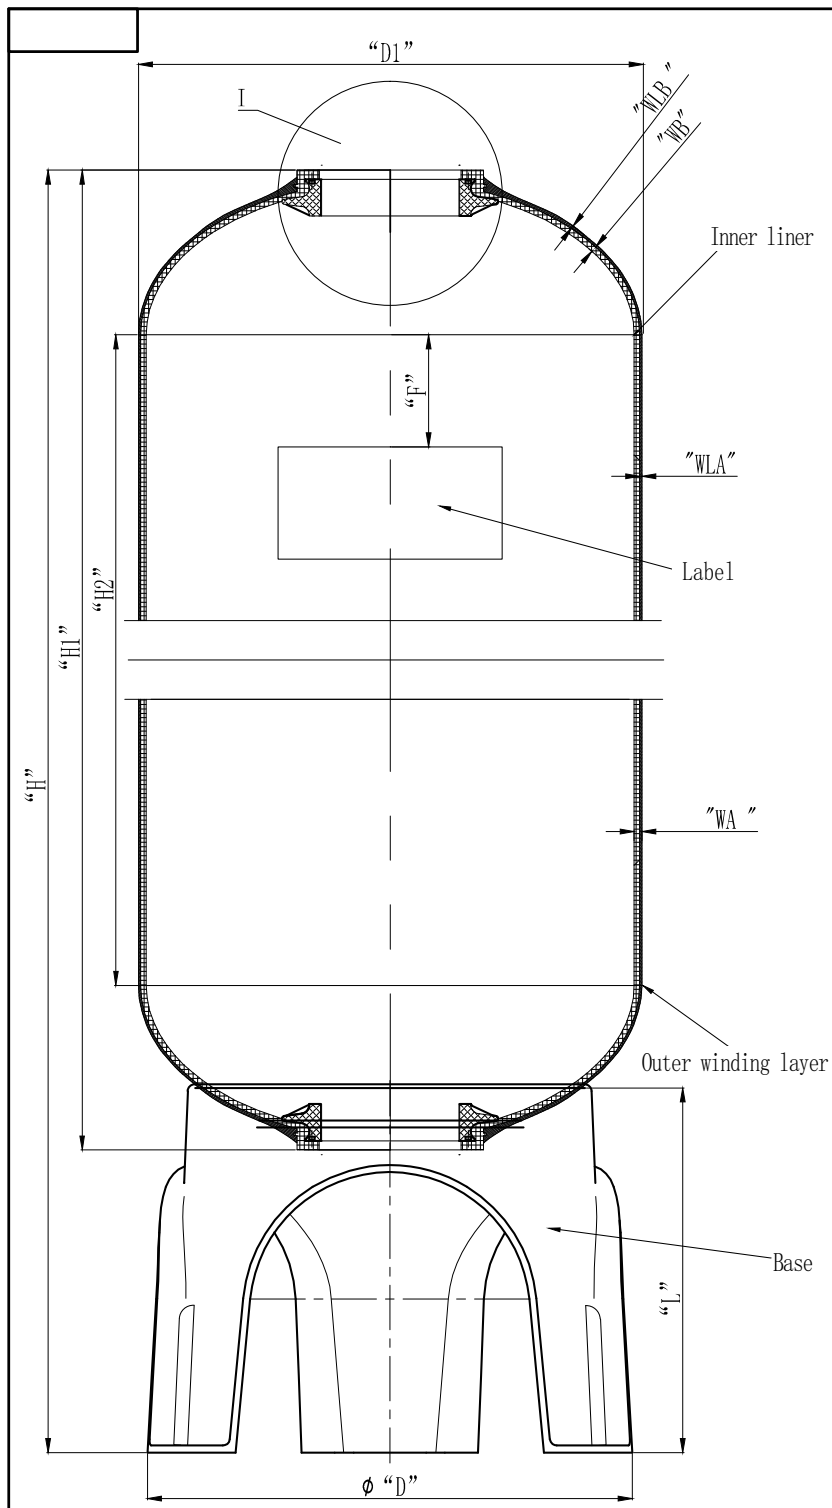

Technical Parameters

Model	Opening	Volume (Ltrs.)	Dimension (mm)											Base	Weight
			D1	D	H $\pm$ 25	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
36 $\times$ 65	-4"-4"	860.0	909	900	1900	1620	1058	398	100	13	7	9.5	3	Tripod	85
36 $\times$ 72	-4"-4"	969.2	909	900	2060	1780	1238	398	100	13	7	9.5	3	Tripod	96

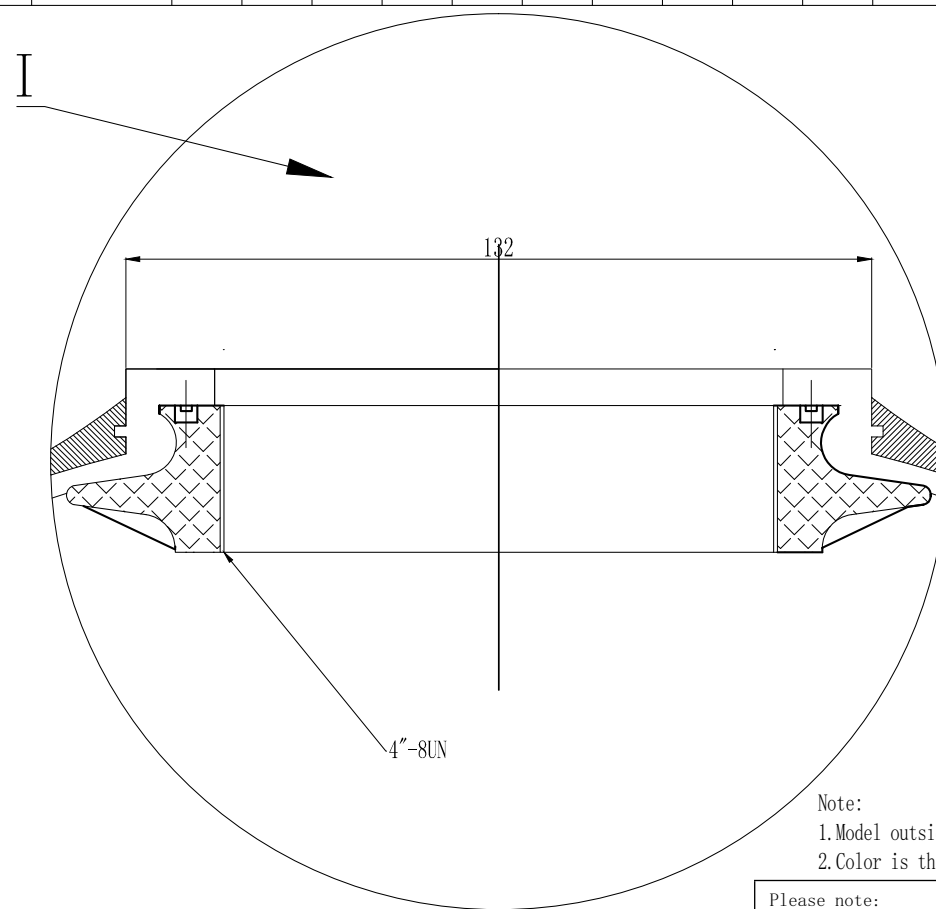

- Note:
1. Model outside carton
 2. Color is the same as package tape color

4"-8UN Internal thread	
Medium Dia	3.918-3.930"
Small Dia.	3.865-3.875"
Large Dia	4.000-4.010"

Please note:
1. Tanks must use with anti-vacuum valve.
2. Instructions:
(1) Max. Working pressure: 10.5 Bar (150 Psi)
(2) Working temperature:
1 $^{\circ}$ C - 50 $^{\circ}$ C (34 $^{\circ}$ F - 127 $^{\circ}$ F).
(3) Vacuum degree: 17 KPa (5"Hg)

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019. 12. 25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co., Ltd.	
Material: FRP	Projection:
Model: 36-4"-4"	Name: FRP softener tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/13
1/1 page	Unit: mm
	Do not measure drawing size