



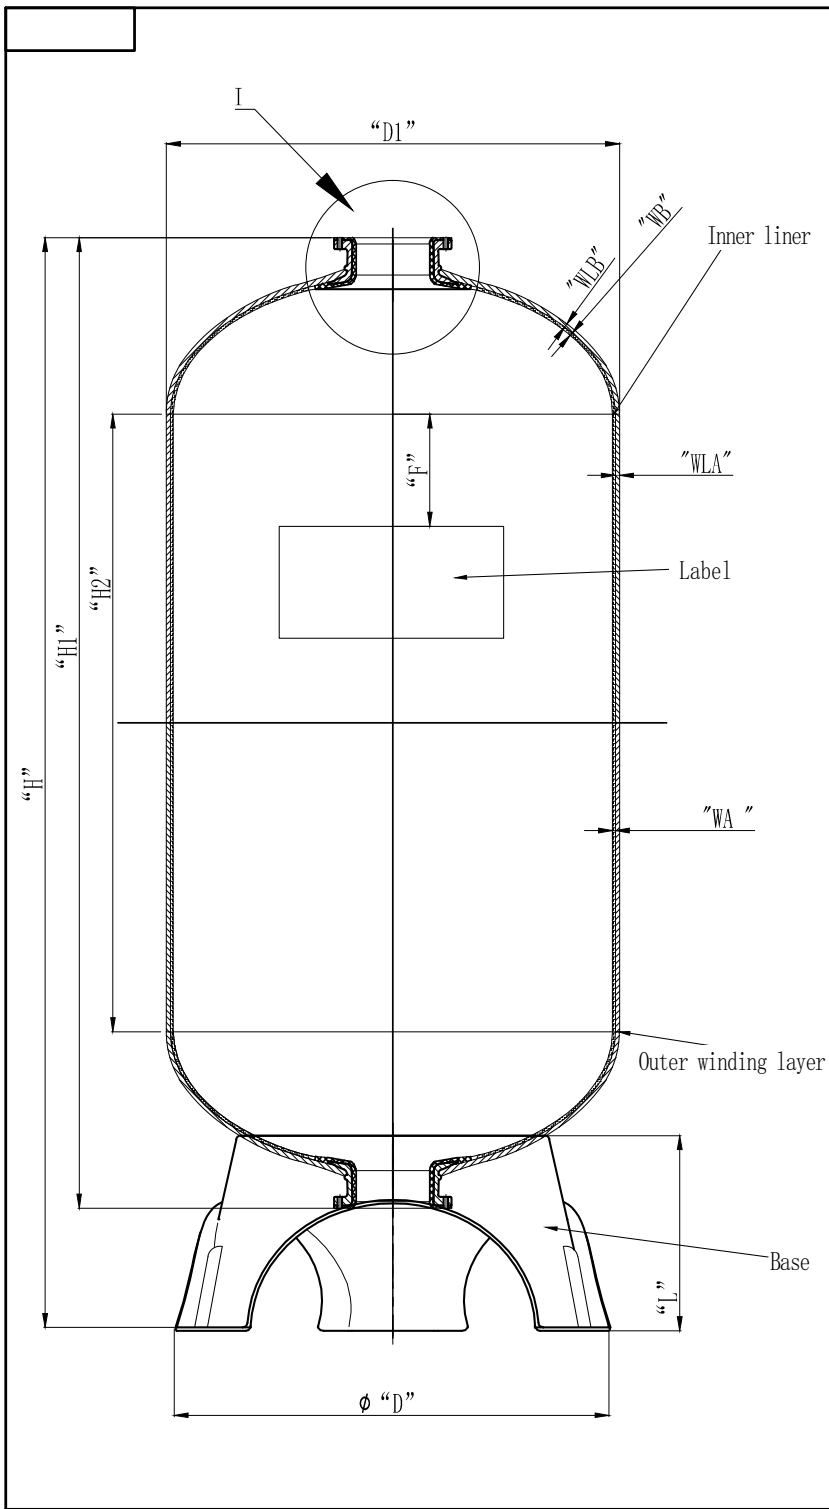

Technical Parameters															
Model	Opening	Volume	Dimension (mm)											Base	Weight
		(Ltrs.)	D1	D	H±30	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
42×72	-6"-6"	1387.5	1070	1066	2180	1990	1156	442	100	15	8	12.5	4	Tripod	145.0

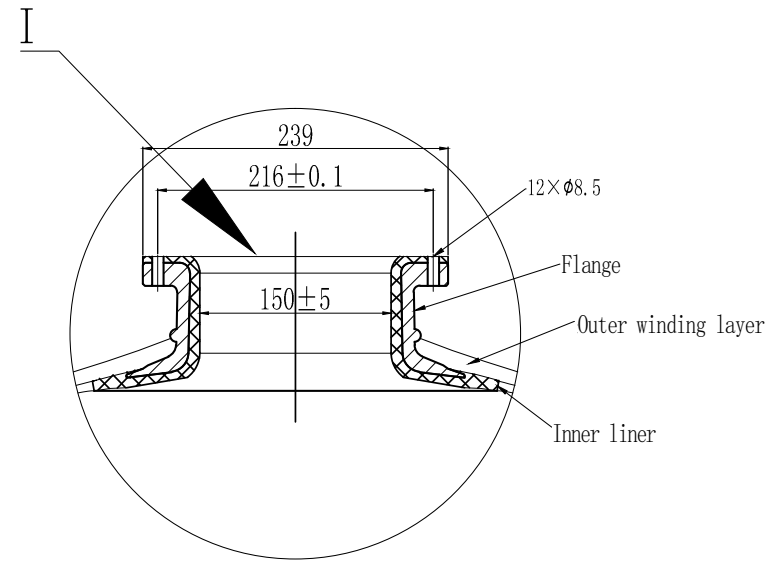

- Note:
1. Model outside carton
 2. Color is the same as package tape color

Please note:
1. Tanks must use with anti-vacuum valve.
2. Instructions:
(1) Max. Working pressure: 10.5 Bar (150 Psi)
(2) Working temperature:
1 °C - 50 °C (34 °F - 127 °F).
(3) Vacuum degree: 17 KPa (5"Hg)

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019. 12. 25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co., Ltd.	
Material: FRP	Projection:
Model: 42-6"-6"	Name: FRP softener tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/13
1/1 page	Unit: mm
	Do not measure drawing size