


Technical Parameters															
Model	Opening	Volume	Dimension (mm)											Base	Weight
		(Ltrs.)	D1	D	H±10	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
20×69	-4"	307.1	512	500	1770	1740	1365	108	100	9	5	7	3	Round	27

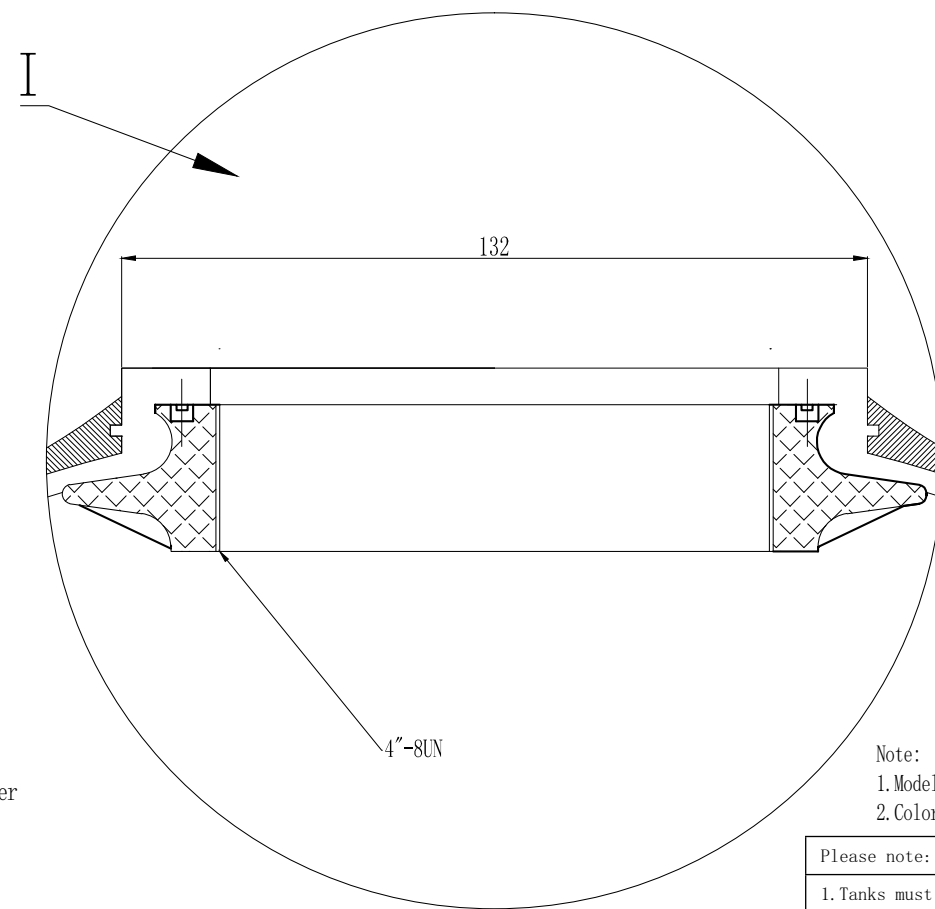

- Note:
- 1.Model outside carton
 - 2.Color is the same as package tape color

Please note:
1.Tanks must use with anti-vacuum valve.
2. Instructions:
(1)Max. Working pressure: 10.5 Bar (150 Psi)
(2)Working temperature:
1 ℃ - 50 ℃ (34 ℉ - 127 ℉).
(3)Vacuum degree: 17 KPa (5"Hg)

4"-8UN Internal thread	
Medium Dia	3.918-3.930"
Small Dia.	3.865-3.875"
Large Dia	4.000-4.010"

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019.12.25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co. , Ltd.	
Material: FRP	Projection: 
Model: 20-4"	Name: FRP softener Tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/14
1/1 page	Unit: mm
	Do not measure drawing size

