



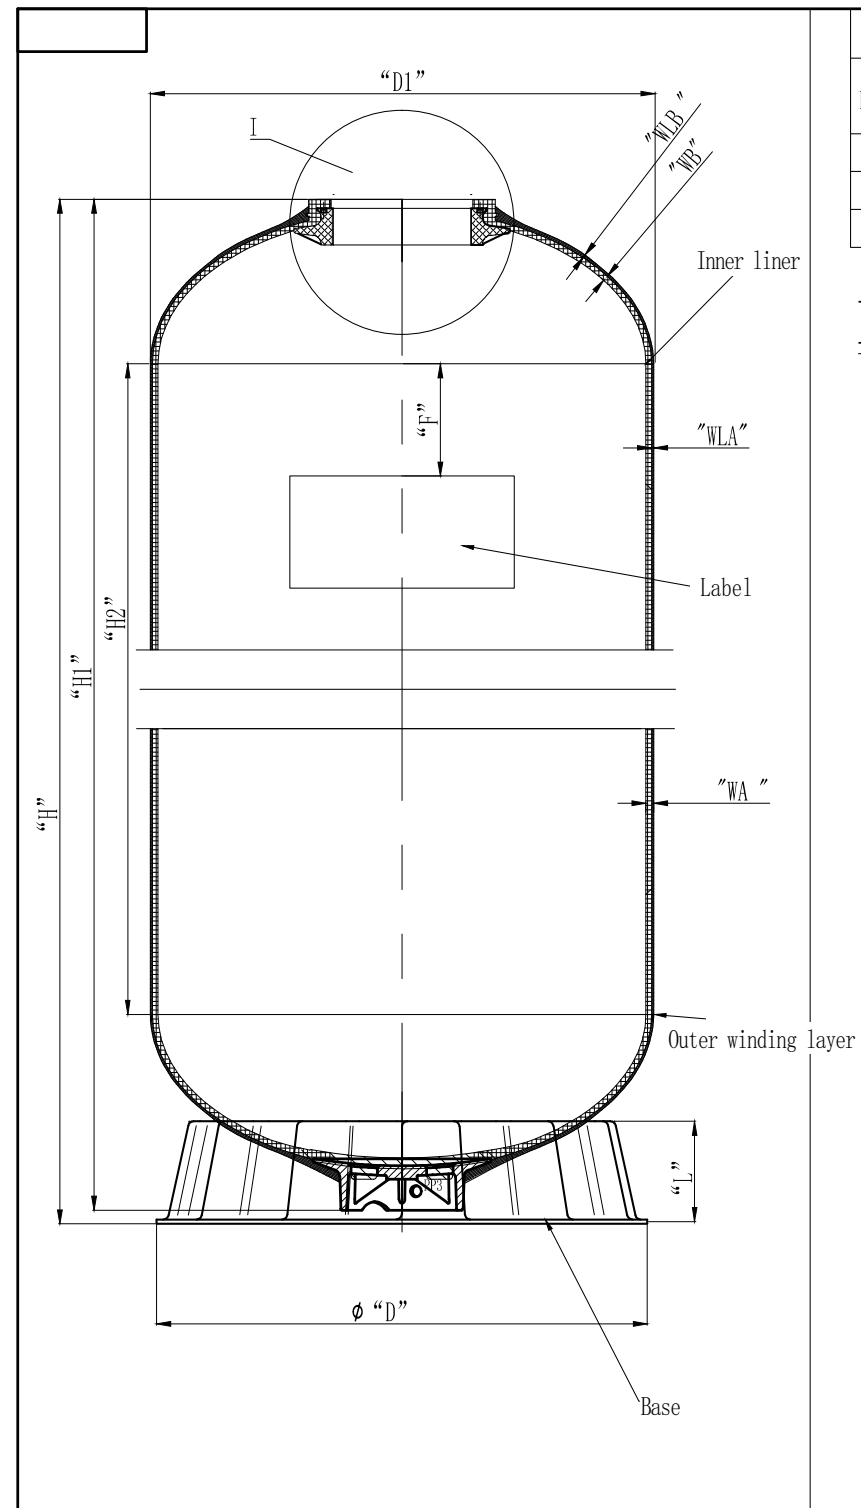

Technical Parameters															
Model	Opening	Volume	Dimension (mm)											Base	Weight
		(Ltrs.)	D1	D	H±10	H1	H2	L	F	WA	WLA	WB	WLB		(kg)
21×36	-4"	164.4	543	530	940	910	588	108	100	9	5	7	3	Round	19.4
21×53	-4"	257.9	543	530	1370	1340	1020	108	100	9	5	7	3	Round	25.4
21×62	-4"	307.8	543	530	1600	1570	1229	108	100	9	5	7	3	Round	29.8

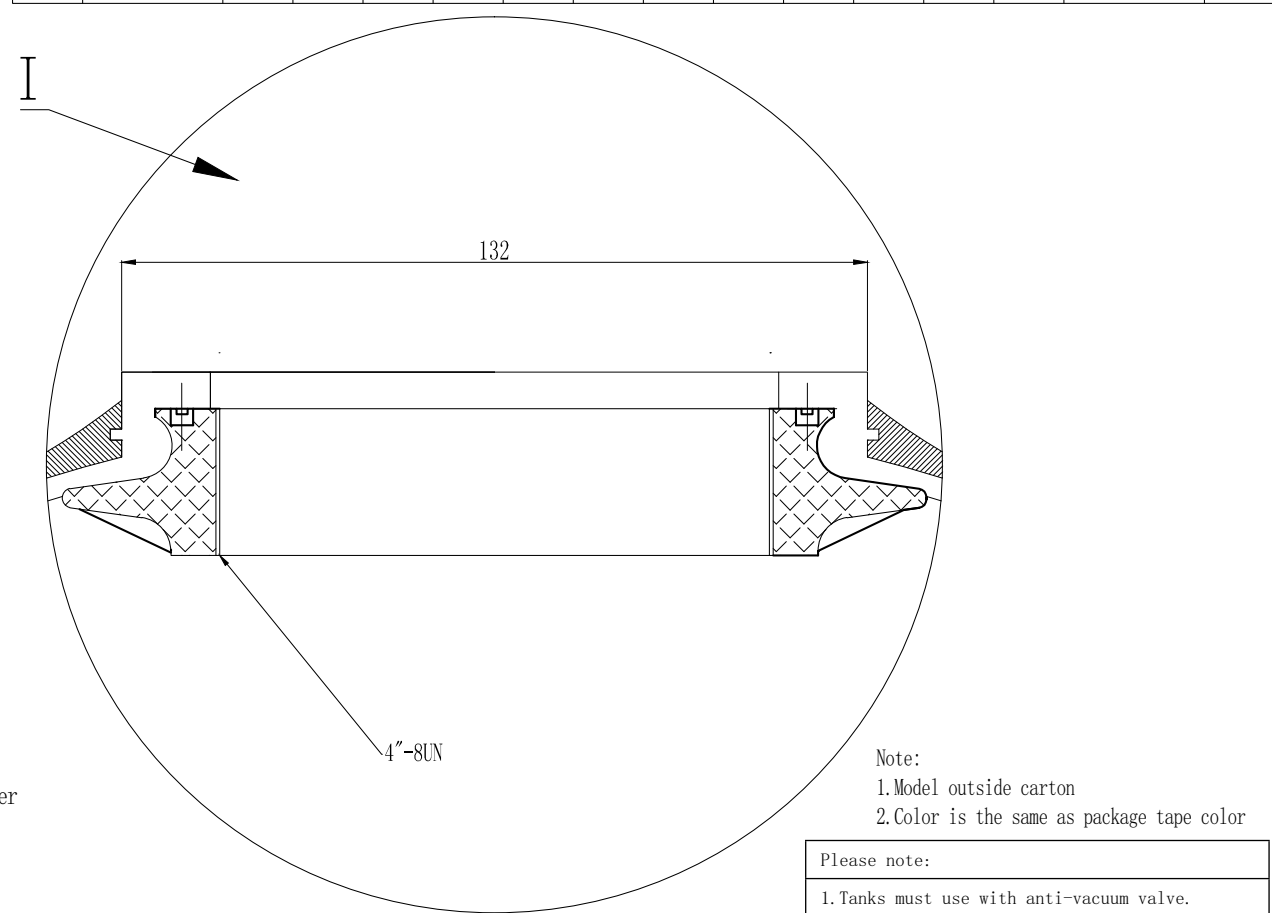

4"-8UN Internal thread	
Medium Dia	3.918-3.930"
Small Dia.	3.865-3.875"
Large Dia	4.000-4.010"

- Note:
1. Model outside carton
 2. Color is the same as package tape color

Please note:	
1. Tanks must use with anti-vacuum valve.	
2. Instructions:	
(1) Max. Working pressure: 10.5 Bar (150 Psi)	
(2) Working temperature:	
1 °C - 50 °C (34 °F - 127 °F).	
(3) Vacuum degree: 17 KPa (5"Hg)	

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019.12.25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co., Ltd.	
Material: FRP	Projection:
Model: 21-4"	Name: FRP softener tanks
Version NO.: 00	Drawing NO.: CD-19-10-02/16
1/1 page	Unit: mm
	Do not measure drawing size