



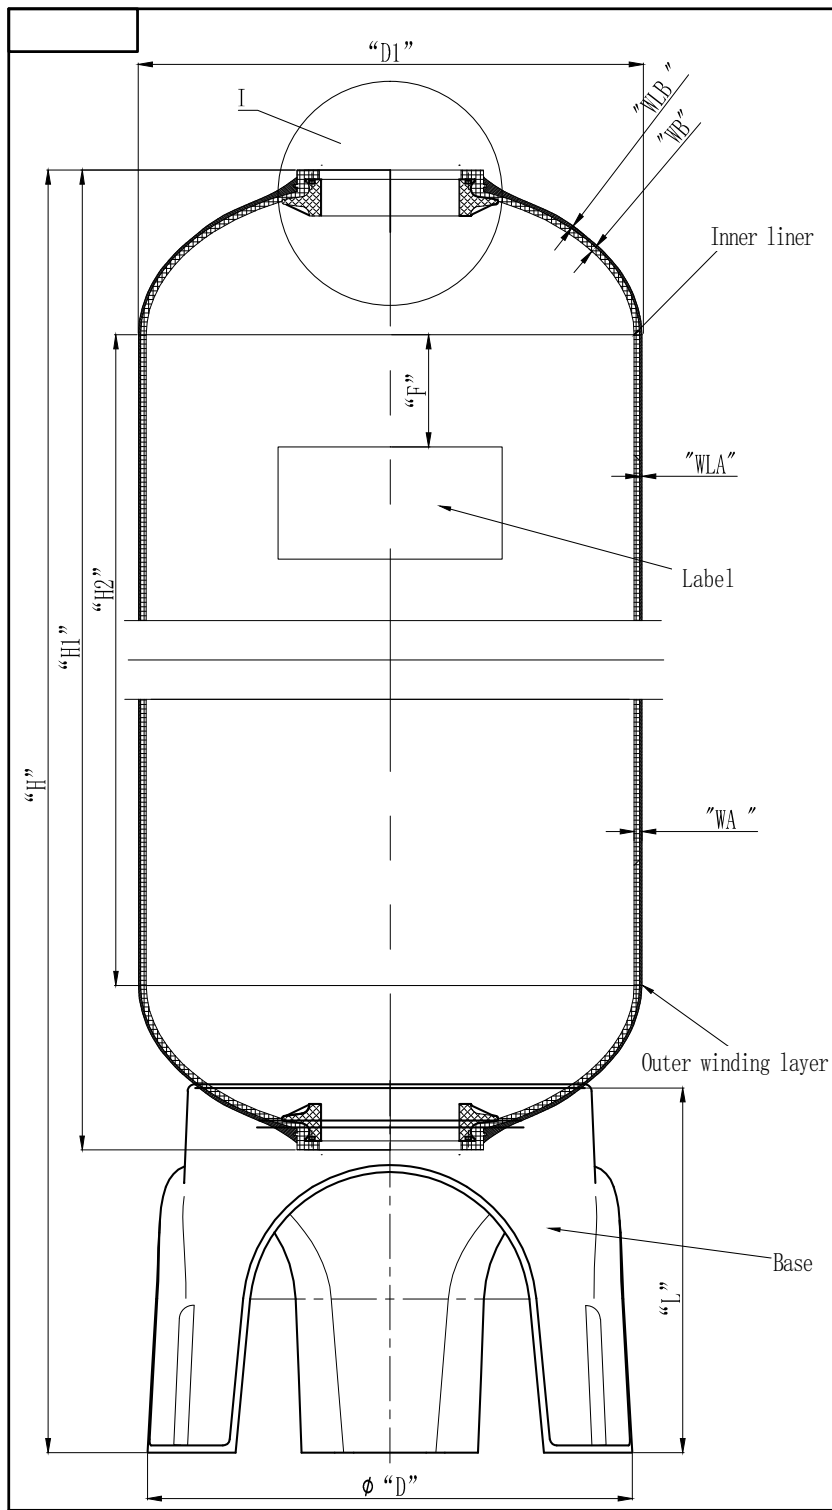

Technical Parameters

Model	Opening	Volume (Ltrs.)	Dimension (mm)											Base		Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB			
24×65	-4"-4"	409.4	614	590	1920	1630	1250	314	100	9	5	7	3	Tripod		41.5
24×72	-4"-4"	460.5	614	590	2080	1820	1430	314	100	9	5	7	3	Tripod		47.5

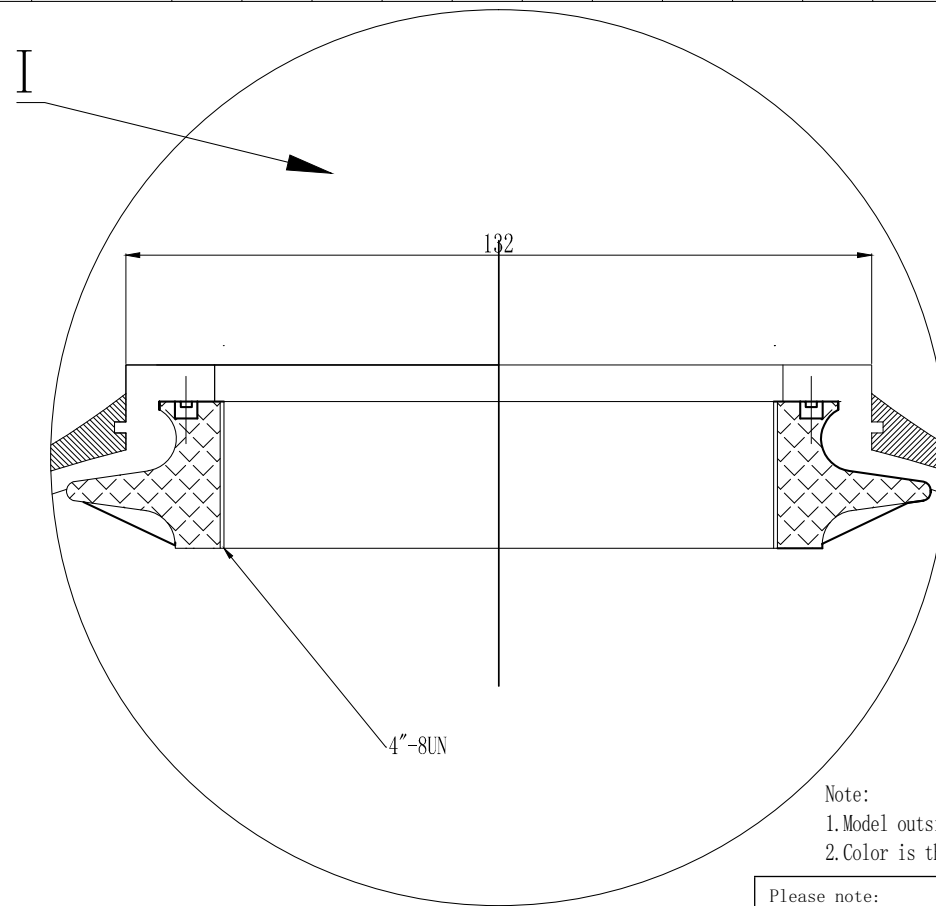

4"-8UN Internal thread	
Medium Dia	3.918-3.930"
Small Dia.	3.865-3.875"
Large Dia	4.000-4.010"

- Note:
- Model outside carton
 - Color is the same as package tape color

Please note:
1. Tanks must use with anti-vacuum valve.
2. Instructions:
(1) Max. Working pressure: 10.5 Bar (150 Psi)
(2) Working temperature:
1 °C - 50 °C (34 °F - 127 °F).
(3) Vacuum degree: 17 KPa (5"Hg)

Designer		
	Signature	Date
Designer	Song Ke Qiang	2019. 12. 25
Verify		
Approval		

Hebei ChengDa HuaMo Technology Co. , Ltd.	
Material: FRP	Projection:
Model: 24-4"-4"	Name: FRP softener
Version NO.: 00	Drawing NO.: CD-19-10-02/18
1/1 page	Unit: mm
	Do not measure drawing size