


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
12×36	T 2.5"	55.6	306	318	920	895	1000	180	100	7	2	6	2	Standand	5.7±0.5
12×48	T 2.5"	77.5	307	318	1233	1205	1000	180	100	7	3	6	2	Standand	7.1±0.5
12×52	T 2.5"	85.3	307	318	1333	1325	1100	180	100	7	3	6	2	Standand	7.9±0.5
12×65	T 2.5"	108.5	307	318	1663	1656	1430	180	100	7	3	6	2	Standand	9.3±0.5

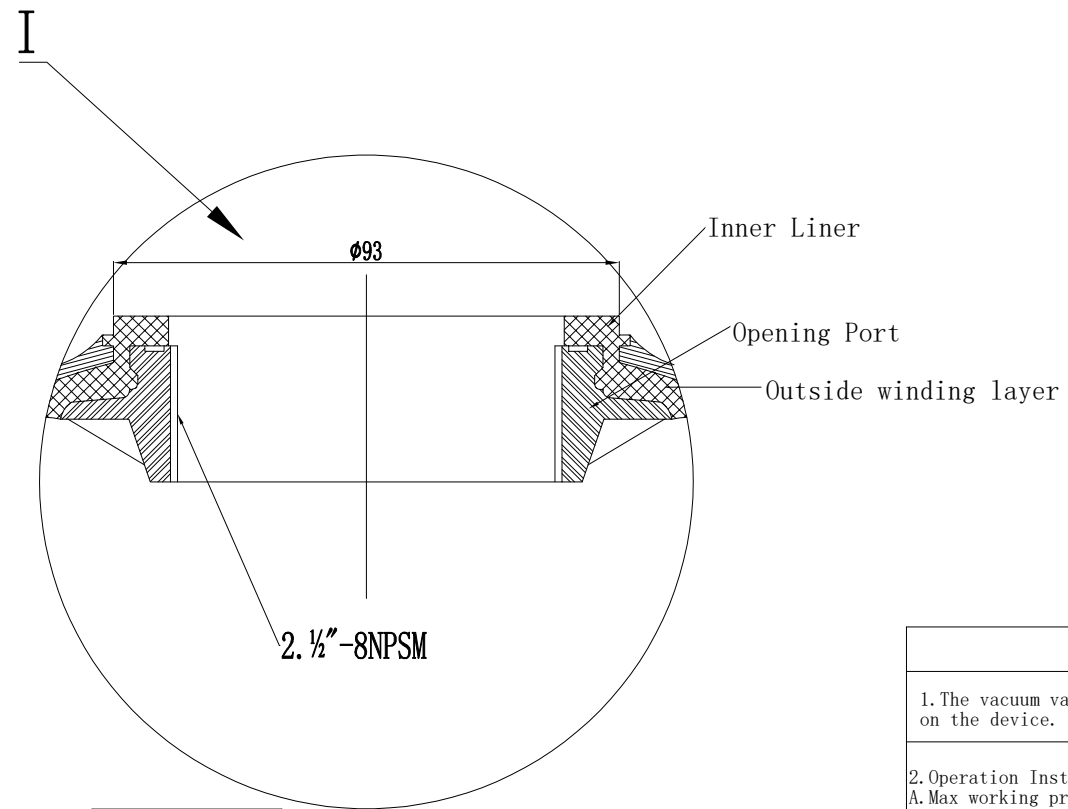

2. 1/2"-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions
 - A. Max working pressure: 10.5bar (150Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5" Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co., Ltd.			
Designer	Signature Chengyang Sun	Date 2024. 7. 16	Material: FRP	Projection:	
Review	Jingwei Hu	2024. 7. 18	Model: 12", 2.5"T	Name: FRP tank	
Approve			Version number: 00	Description of Change Version	Drawing No.: CD-22-09-28/24
Please don't measure the size of the drawing.			Unit: mm	1 Page Page 1	