


Technical Parameters														Base	Weight (kg)
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)												
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
13×44	T 2.5"	84.4	335	343	1146	1113	924	183	100	7	3	6	2	Standand	9.4±0.6
13×52	T 2.5"	102.3	334	343	1350	1340	1136	183	100	7	3	6	2	Standand	9.8±0.6
13×54	T 2.5"	105.2	334	343	1396	1386	1182	183	100	7	3	6	2	Standand	10.3±0.6

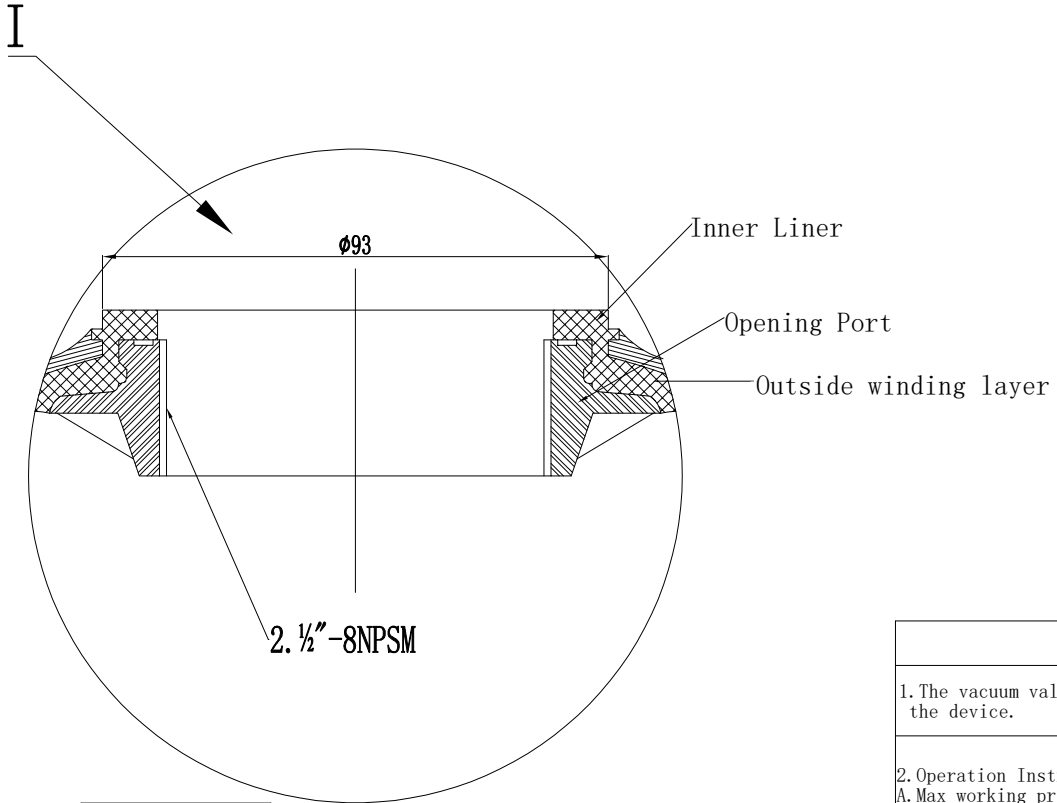

2. 1/2"-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions
 - A. Max working pressure: 10.5bar(150Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5" Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material:	FRP	Projection:	
Designer	Chengyang Sun	2024. 7. 16	Model:	13", 2.5"(new)	Name:	FRP tank
Review	Jingwei Hu	2024. 7. 18	Version 00	Description of Change Version:		Drawing No. : CD-23-08-31/00
Approve			Please don't measure the size of the drawing.		Unit: mm	1 Page Page 1