


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±6	H1	H2	L	F	WA	WLA	WB	WLB		
9×17	T 2.5"	13.8	231	240	455	433	275	140	50	4.8	1.8	5	1	Standard	2.3±0.2
9×35	T 2.5"	31.1	231	240	900	878	720	140	100	4.8	1.8	5	1	Standard	3.6±0.3
9×42	T 2.5"	37.8	231	240	1073	1051	893	140	100	4.8	1.8	5	1	Standard	4.5±0.4
9×48	T 2.5"	43.7	231	240	1225	1203	1045	140	100	4.8	1.8	5	1	Standard	4.9±0.4

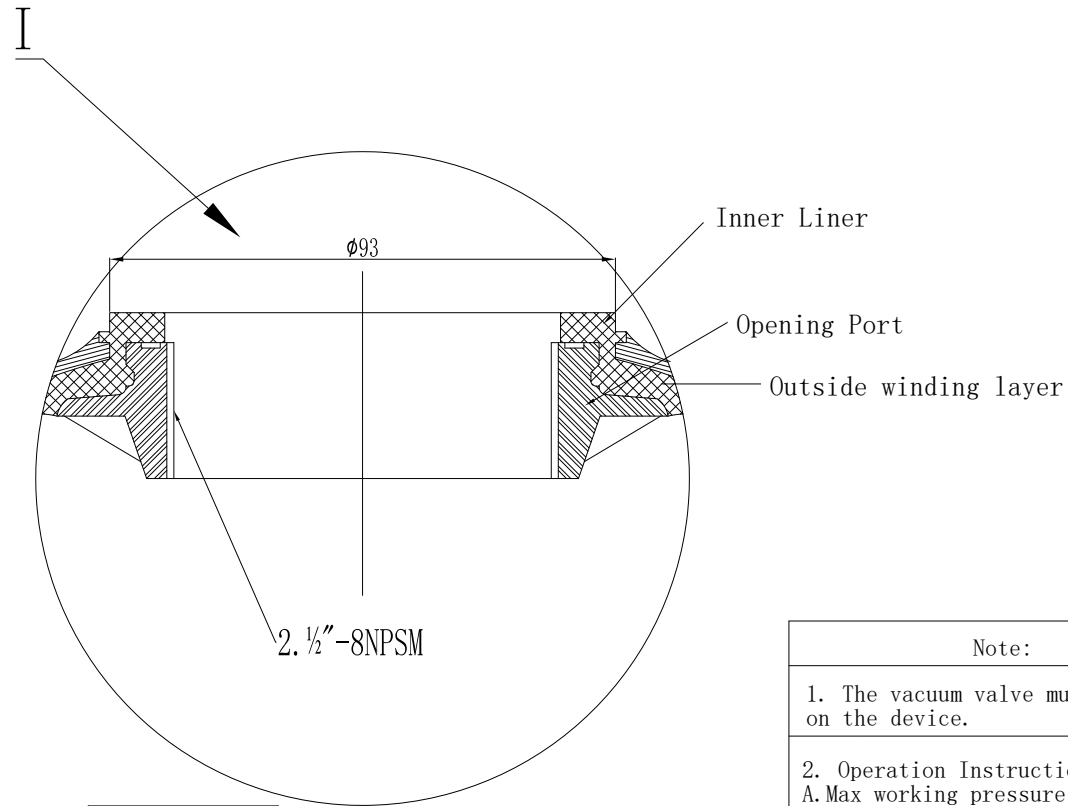

1/2"-8NPSM internal thread	
Middle Dia	2.762-2.768"
Min Dia	2.705-2.715"
Max Dia	2.843-2.849"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
 A. Max working pressure: 8bar (125Psi) B
 . Temperature Range: 1-50°C (34-127°F)
 C. Maximum vacuum: 17Kpa (5"Hg)

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material:	FRP	Projection:	
Designer	Chengyang Sun	2024.07.18	Model:	9" T 2.5"	Name:	FRP tank
Review	Jingwei Hu	2024.07.18	Version number:00	Description of Change Version	Drawing No.	CD-22-09-27/07
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page 1 Page