


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±10	H1	H2	L	F	WA	WLA	WB	WLB		
21×36	4" T	164.4	543	530	940	910	588	108	100	9	5	7	3	Round	17±2
21×53	4" T	257.9	543	530	1370	1340	1020	108	100	9	5	7	3	Round	22±2
21×62	4" T	307.8	543	530	1600	1570	1229	108	100	9	5	7	3	Round	27±2

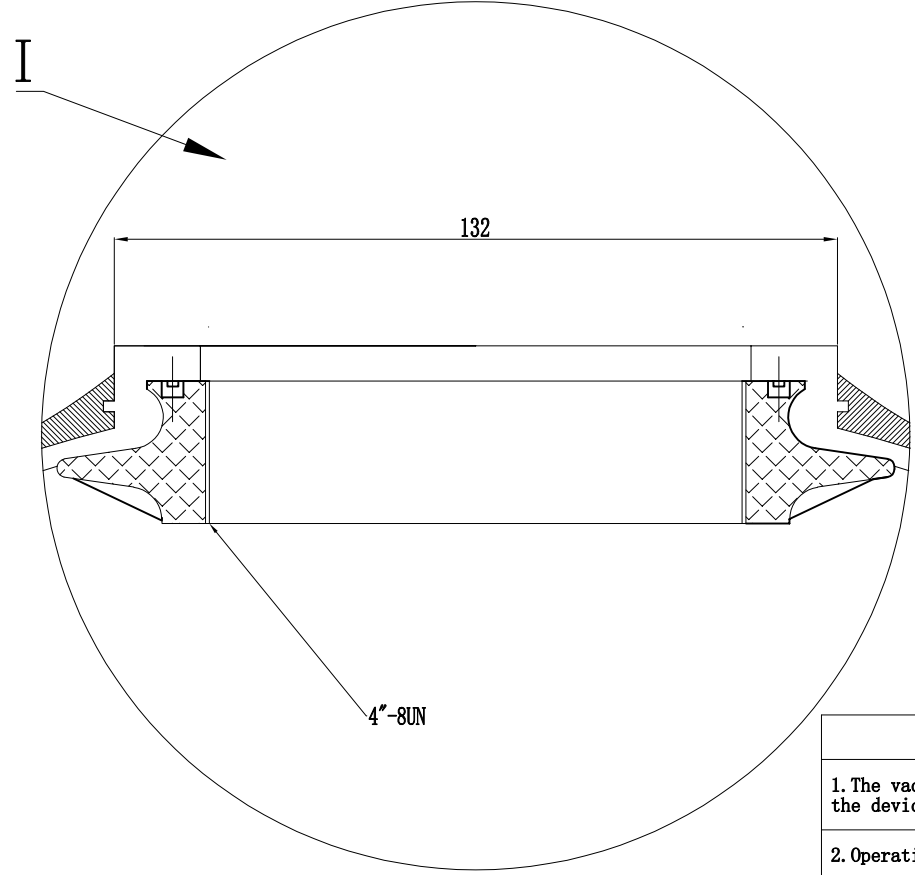

4"-8UN	Internal thread
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
 - A. Max working pressure: 10.5Bar (150Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5"Hg)

Remark

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign			Hebei Chengda WaterTechnology Co., Ltd.			
	Signature	Date	Material:	FRP	Projection:	
Designer	Chengyang Sun	2024. 7. 16	Model:	21", 4" T	Name:	FRP tank
Review	Jingwei Hu	2024. 7. 18	Version number:	00	Description of Change Version	Drawing No. CD-22-09-28/52
Approve			Please don't measure the size of the drawing		Unit: mm	1 Page Page 1