


Technical Parameters

Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±25	H1	H2	L	F	WA	WLA	WB	WLB		
36×65	3665-4-4-D	860.0	906	900	1910	1630	1120	398	100	9.5	4.5	9.5	3	Triangular	70±5
36×72	3672-4-4-D	969.2	906	900	2090	1810	1300	398	100	9.5	4.5	9.5	3	Triangular	76±5

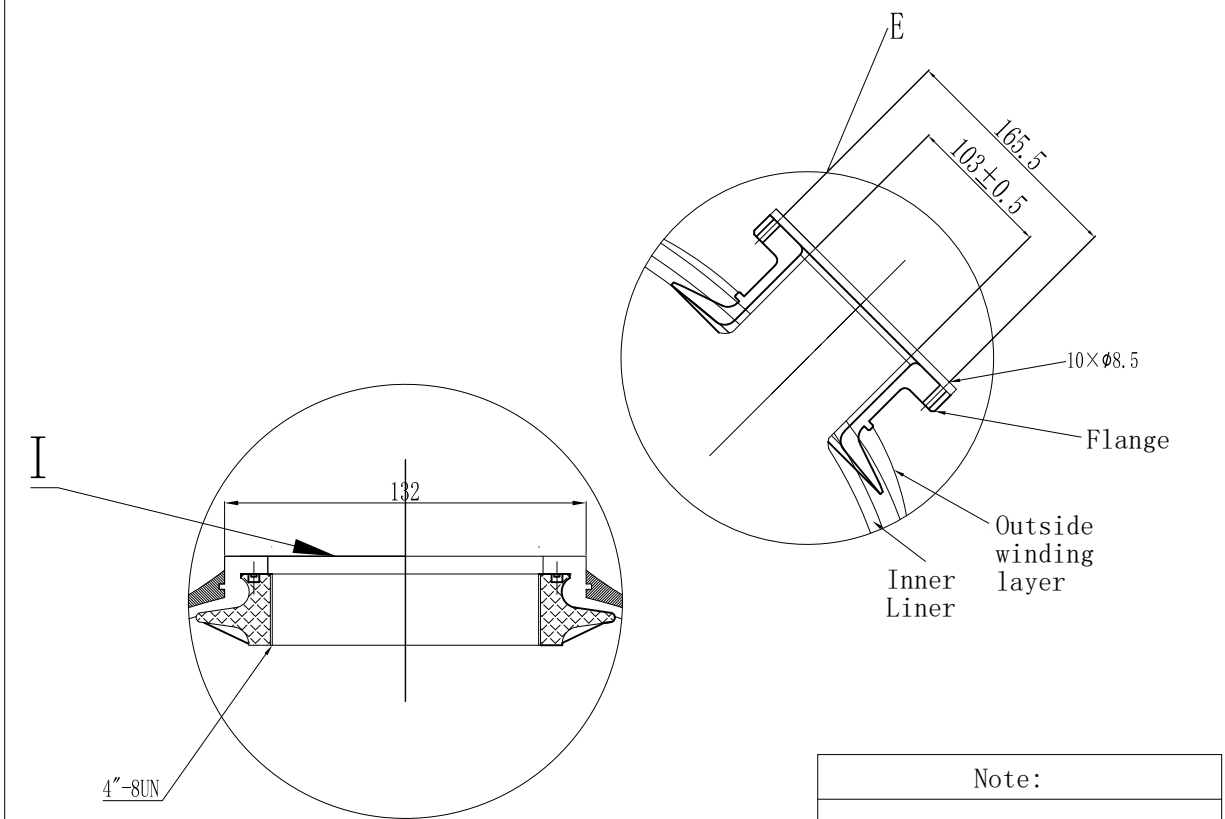

4"-8UN Internal thread	
Middle Dia	3.918-3.930"
Min Dia	3.865-3.875"
Max Dia	4.000-4.010"

Note:

- The vacuum valve must be installed on the device.
- Operation Instructions:
 - A. Max working pressure: 8Bar (125Psi)
 - B. Temperature Range: 1-50°C (34-127°F)
 - C. Maximum vacuum: 17Kpa (5"Hg)

Remark
 1. Product type identification see outer packaging logo.
 2. The product color is consistent with the color of the tape packaging box.

Sign		Hebei Chengda WaterTechnology Co.,Ltd.	
	Signature	Date	
Designer	Chengyang Sun	2024.07.18	Material: FRP Projection:
Review	Jingwei Hu	2024.07.18	Model: 36", 4"T/B-4" Name: FRP tank
Approve			Version number: 00 lower discharge port Drawing No. CD-22-09-27/40
Please don't measure the size of the drawing		Unit: mm	1 Page Page 1