


Technical Parameters															
Model	Opening Size	VOL (Ltrs.)	Size Parameters (mm)											Base	Weight (kg)
			D1	D	H±30	H1	H2	L	F	WA	WLA	WB	WLB		
48×72	4872-6-6-D	1751.3	1213	1200	2260	1960	980	500	100	14.5	6.5	12.5	3.5	Triangular	126±10
48×94	4894-6-6-D	1910	1213	1200	2400	2100	1130	500	100	14.5	6.5	12.5	3.5	Triangular	136±10

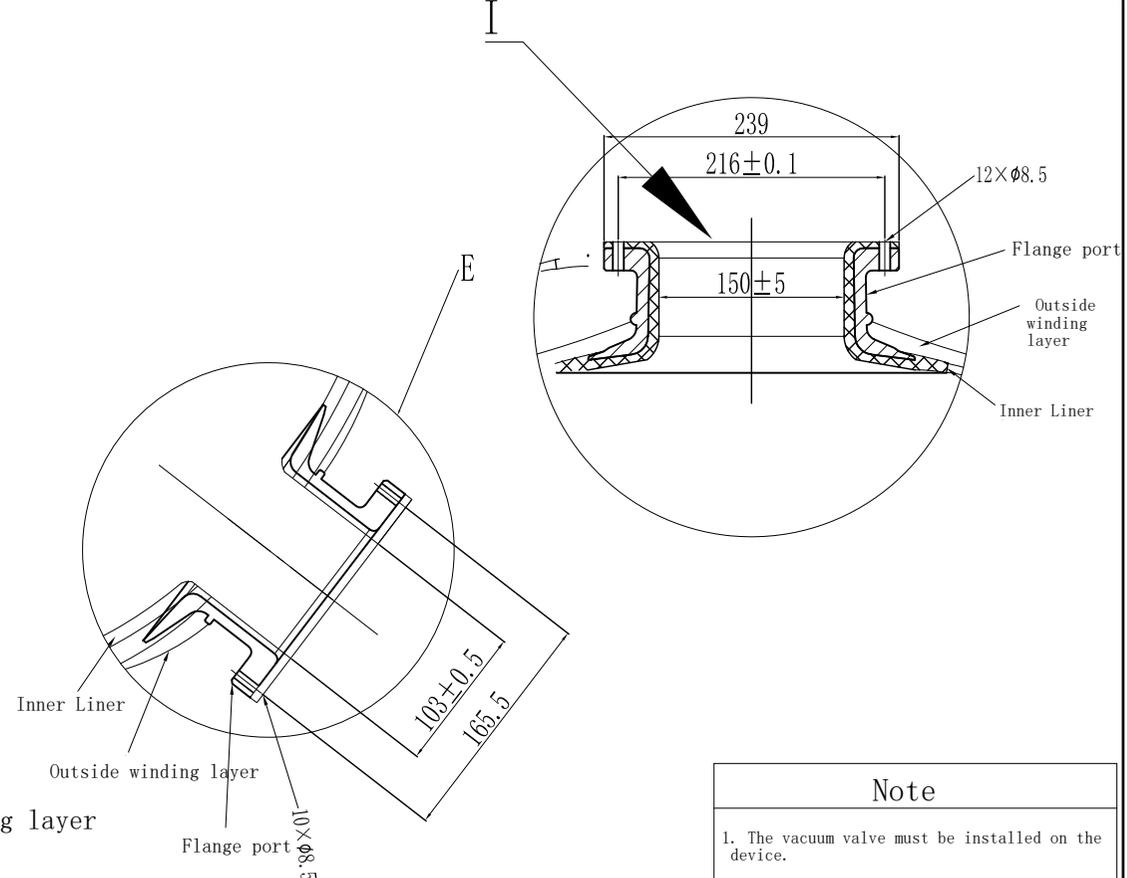

**Note**

- The vacuum valve must be installed on the device.
- Operation Instructions:
  - A. Max working pressure: 8bar (125Psi)
  - B. Temperature Range: 1-50°C (34-127°F)
  - C. Maximum vacuum: 17Kpa (5\"/>

**Remark**

- Product type identification see outer packaging logo.
- The product color is consistent with the color of the tape packaging box.

Sign			河北成达水处理科技有限公司			
Signature	Date	Material	FRP	Projection:		
Designer: Chengyang Sun	2024.07.18	Model	48\"/>	Name: FRP tank		
Review: Jingwei Hu	2024.07.18	Version number: 00	Description of Change Version	Drawing No. CD-22-09-27/53		
Approve		Please don't measure the size of the drawing		Unit: mm	1 Page Page 1	